

FEATURES & BENEFITS

SPECS

8 (4 Shielded Pairs)
Conductors

23 AWG

Conductor Size

FPE

Insulation Material


Connected Shield

Continuity Between Connector Plugs

12.3 pF/ft

Capacitance Between Conductors

Etherlatch™ Cat 6 Cable

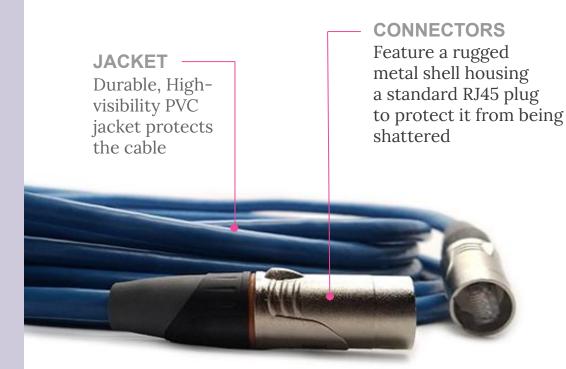

APPLICATIONS

Broadcasting

Communications

Installations

Pro AV

