

FEATURES & BENEFITS



SPEAKERLATCH™ CONNECTORS

SPECS

4
(NO. OF CONTACTS)

16A @ 250V AC
(VOLTAGE RATING)

SILVER
(CONTACT PLATING)

≤ 2.5 pF
(CAPACITANCE BETWEEN CONTACTS)

E500108
(USA UL LISTED)

APPLICATIONS

FULL RANGE SPEAKERS

BI-AMP SPEAKERS

HIGH VOLTAGE SIGNAL TRANSMISSION

INDUSTRIAL CONTROL

PAGING SYSTEMS

EMERGENCY COMMUNICATION SYSTEMS



FLAT TAB TERMINALS


Flat tab terminals allow user to use standard crimp or faston connectors to simplify termination.

KEYWAYS

Specifically keyed for twist-lock connection and to prevent intermating errors.

STRAIN RELIEF

The internal strain relief prevents excessive bending at the junction.

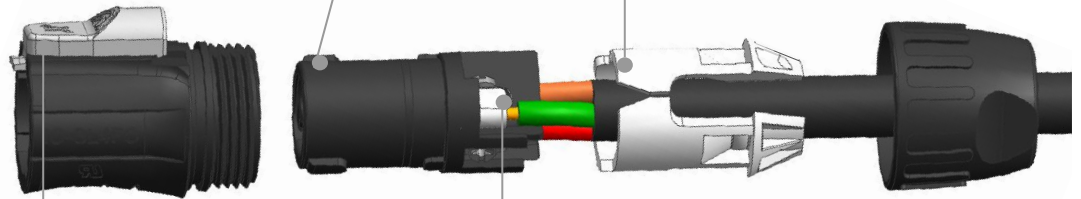

LATCH LOCK

Latch lock provides exceptional operational safety.

SCREW TERMINALS

Screw terminals provide easy onsite troubleshooting and assembly for quick turnaround time.

Product specifications may change without prior notification