

FEATURES & BENEFITS



B SERIES 3 PIN XLR CHASSIS CONNECTORS

SPECS

3
(NO. OF CONTACTS)

6 A @ 50 V AC
(VOLTAGE RATING)

GOLD
(CONTACT PLATING)

≤ 2.0 pF
(CAPACITANCE BETWEEN CONTACTS)

APPLICATIONS

BALANCED AUDIO

LOW VOLTAGE SIGNAL TRANSMISSION


INDUSTRIAL CONTROL

GOLD PINS

Gold plated pins extend the useful life and mating cycles. Available in 3, 4 or 5 pin variations.

LATCH LOCK

Latch lock provides increased operational safety.

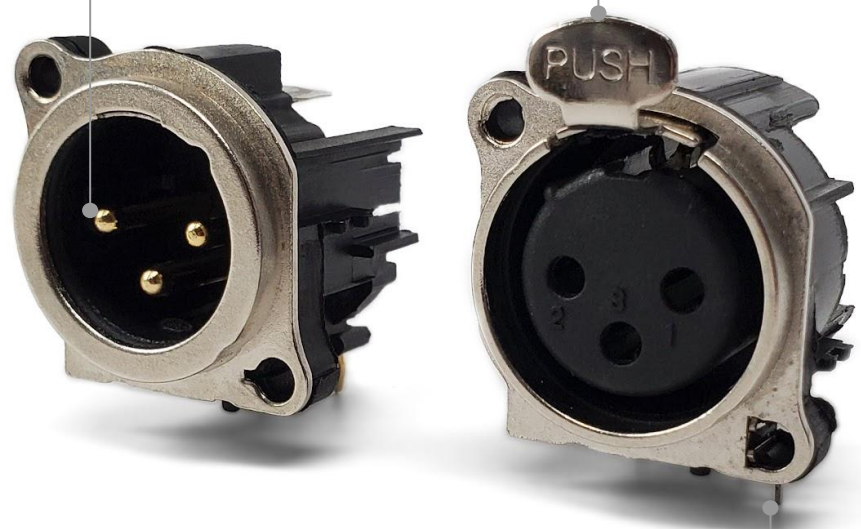

SEPARATE GROUND PIN

These connectors feature a discrete grounding pin which electrically grounds the shell of the mating connector and to the panel.

PCB MOUNTED FLAMMABILITY RATINGS

Available in both vertical and horizontal PCB mount options to fit most design needs.

Meets UL 94 V-0 flammability rating for ultimate peace of mind.

* Photo of IO-XLR3-M-BH & IO-XLR3-F-BH

Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc.

10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 | www.ioaudiotechnologies.com

FEATURES & BENEFITS



B SERIES 4 PIN XLR CHASSIS CONNECTORS

SPECS

4
(NO. OF CONTACTS)

4.5 A @ 50 V AC
(VOLTAGE RATING)

GOLD
(CONTACT PLATING)

≤ 2.0 pF
(CAPACITANCE BETWEEN CONTACTS)

APPLICATIONS

BALANCED AUDIO

LOW VOLTAGE SIGNAL TRANSMISSION

LOW VOLTAGE DC POWER

CONTROL

GOLD PINS

Gold plated pins extend the useful life and mating cycles. Available in 3, 4 or 5 pin variations.

LATCH LOCK

Latch lock provides increased operational safety.



SEPARATE GROUND PIN

These connectors feature a discrete grounding pin which electrically grounds the shell of the mating connector and to the panel.

PCB MOUNTED FLAMMABILITY RATINGS

Available in both vertical and horizontal PCB mount options to fit most design needs.

Meets UL 94 V-0 flammability rating for ultimate peace of mind.

* Photo of IO-XLR4-M-BH & IO-XLR4-F-BH

Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc.

10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 | www.ioaudiotechnologies.com

FEATURES & BENEFITS



B SERIES 5 PIN XLR CHASSIS CONNECTORS

SPECS

5
(NO. OF CONTACTS)

3 A @ 50 V AC
(VOLTAGE RATING)

GOLD
(CONTACT PLATING)

≤ 2.0 pF
(CAPACITANCE BETWEEN CONTACTS)

APPLICATIONS

BALANCED AUDIO

LOW VOLTAGE SIGNAL TRANSMISSION


INDUSTRIAL CONTROL

GOLD PINS

Gold plated pins extend the useful life and mating cycles. Available in 3, 4 or 5 pin variations.

LATCH LOCK

Latch lock provides increased operational safety.

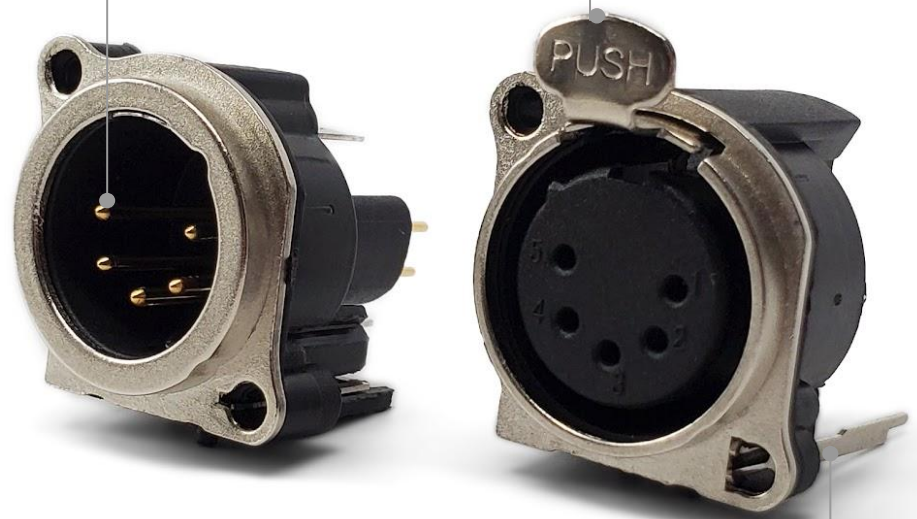

SEPARATE GROUND PIN

These connectors feature a discrete grounding pin which electrically grounds the shell of the mating connector and to the panel.

PCB MOUNTED FLAMMABILITY RATINGS

Available in both vertical and horizontal PCB mount options to fit most design needs.

Meets UL 94 V-0 flammability rating for ultimate peace of mind.

* Photo of IO-XLR5-M-BV & IO-XLR5-F-BV

Product specifications may change without prior notification

Io Audio Technologies® is a registered trademark of Knight Electronics, Inc.

10557 Metric Dr. Dallas, TX 75243 | 214-340-0265 | 800-323-2439 | Fax: 214-340-5870 | www.ioaudiotechnologies.com